

Philips

Diode BYV96D

Datasheet

# Silicon Diode

## **BYV96D**

800V/1.5A

# DATASHEET

OEM – Philips

Source: Philips Databook 1999

## Fast soft-recovery controlled avalanche rectifiers

**BYV96 series**

### FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Available in ammo-pack.

### DESCRIPTION

Rugged glass package, using a high temperature alloyed construction. This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.



MAM047

Fig.1 Simplified outline (SOD57) and symbol.

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{RRM}$	repetitive peak reverse voltage		–	800	V
	BYV96D		–	1000	V
$V_R$	continuous reverse voltage		–	800	V
	BYV96D		–	1000	V
$I_{F(AV)}$	average forward current	$T_{tp} = 55^\circ\text{C}$ ; lead length = 10 mm see Fig 2; averaged over any 20 ms period; see also Fig 6	–	1.5	A
		$T_{amb} = 55^\circ\text{C}$ ; PCB mounting (see Fig.11); see Fig 3; averaged over any 20 ms period; see also Fig 6	–	0.8	A
$I_{FRM}$	repetitive peak forward current	$T_{tp} = 55^\circ\text{C}$ ; see Fig 4	–	17	A
		$T_{amb} = 55^\circ\text{C}$ ; see Fig 5	–	9	A
$I_{FSM}$	non-repetitive peak forward current	$t = 10 \text{ ms half sine wave};$ $T_j = T_{j\max}$ prior to surge; $V_R = V_{RRM\max}$	–	35	A
$E_{RSM}$	non-repetitive peak reverse avalanche energy	$L = 120 \text{ mH}; T_j = T_{j\max}$ prior to surge; inductive load switched off	–	10	mJ
$T_{stg}$	storage temperature		-65	+175	°C
$T_j$	junction temperature	see Fig 7	-65	+175	°C

---

**Fast soft-recovery  
controlled avalanche rectifiers**

BYV96 series

**ELECTRICAL CHARACTERISTICS** $T_j = 25^\circ\text{C}$  unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_F$	forward voltage	$I_F = 3 \text{ A}; T_j = T_{j\max};$ see Fig 8	—	—	1.35	V
		$I_F = 3 \text{ A};$ see Fig 8	—	—	1.60	V
$V_{(BR)R}$	reverse avalanche breakdown voltage BYV96D BYV96E	$I_R = 0.1 \text{ mA}$	900	—	—	V
$I_R$	reverse current	$V_R = V_{RRM\max};$ see Fig 9	—	—	1	$\mu\text{A}$
		$V_R = V_{RRM\max}; T_j = 165^\circ\text{C};$ see Fig 9	—	—	150	$\mu\text{A}$
$t_{rr}$	reverse recovery time	when switched from $I_F = 0.5 \text{ A}$ to $I_R = 1 \text{ A};$ measured at $I_R = 0.25 \text{ A};$ see Fig 12	—	—	300	ns
$C_d$	diode capacitance	$f = 1 \text{ MHz}; V_R = 0 \text{ V};$ see Fig 10	—	40	—	pF
$\left  \frac{dI_R}{dt} \right $	maximum slope of reverse recovery current	when switched from $I_F = 1 \text{ A}$ to $V_R \geq 30 \text{ V}$ and $dI_F/dt = -1 \text{ A}/\mu\text{s};$ see Fig.13	—	—	6	$\text{A}/\mu\text{s}$

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th,j-tp}$	thermal resistance from junction to tie-point	lead length = 10 mm	46	K/W
$R_{th,j-a}$	thermal resistance from junction to ambient	note 1	100	K/W



**Note**

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer  $\geq 40 \mu\text{m},$  see Fig.11.  
For more information please refer to the 'General Part of Handbook SC01'

**Fast soft-recovery  
controlled avalanche rectifiers**




**BYV96 series**

**GRAPHICAL DATA**

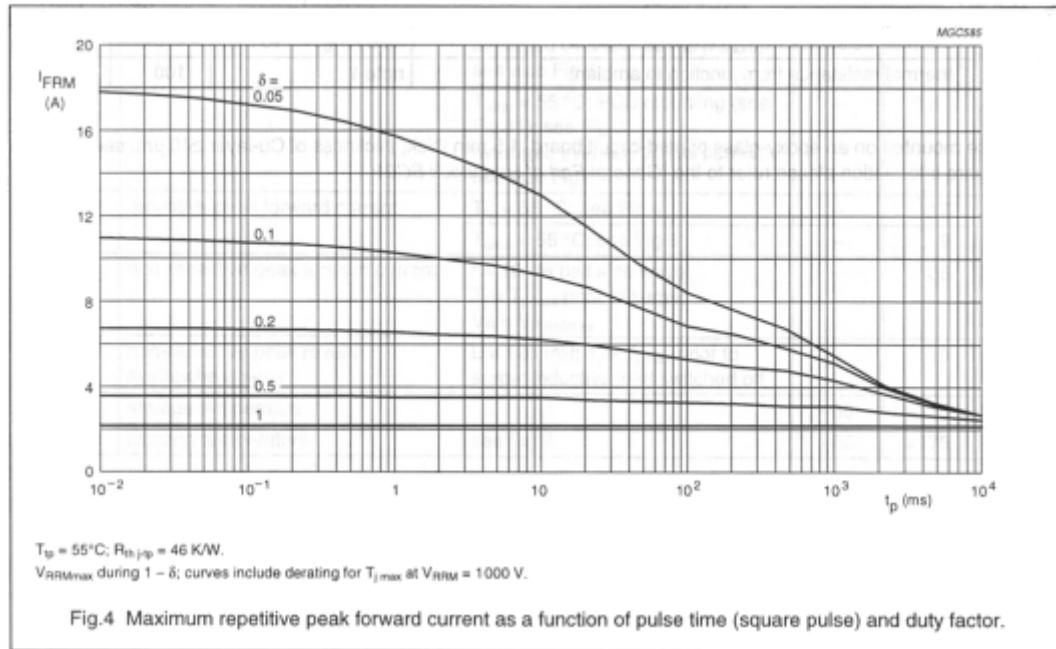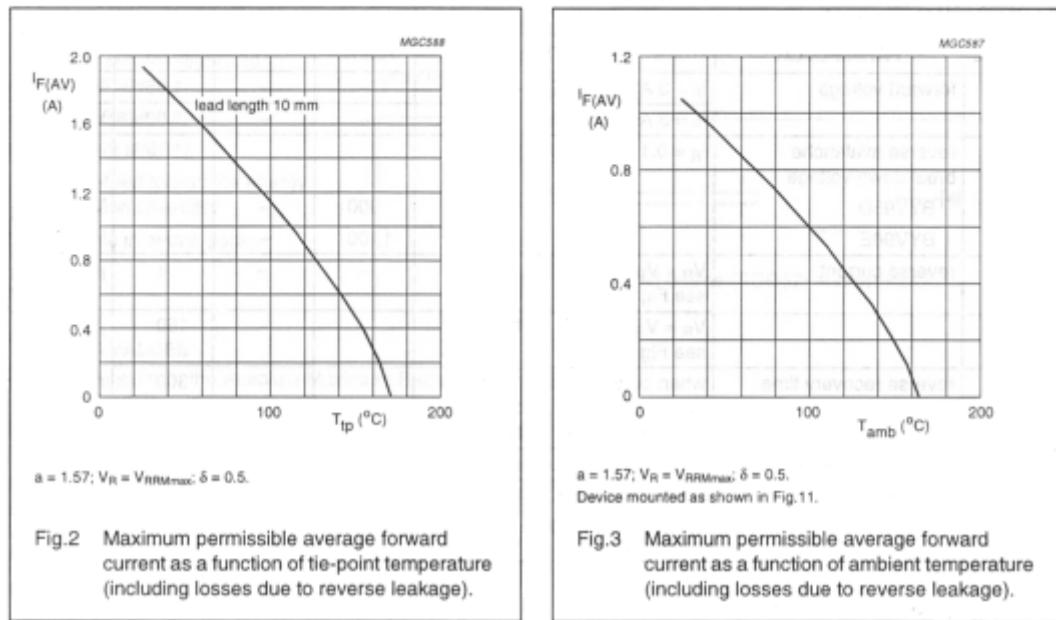


Fast soft-recovery  
controlled avalanche rectifiers

BYV96 series

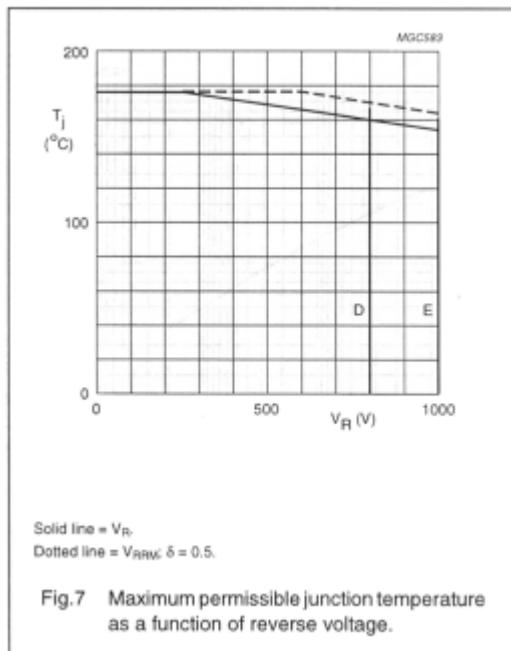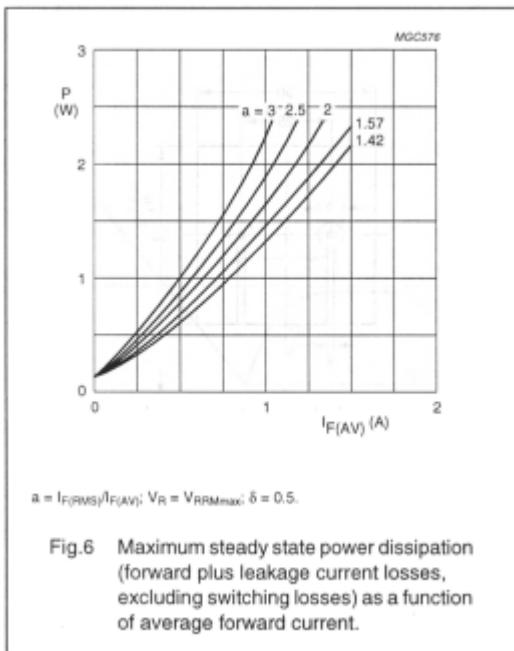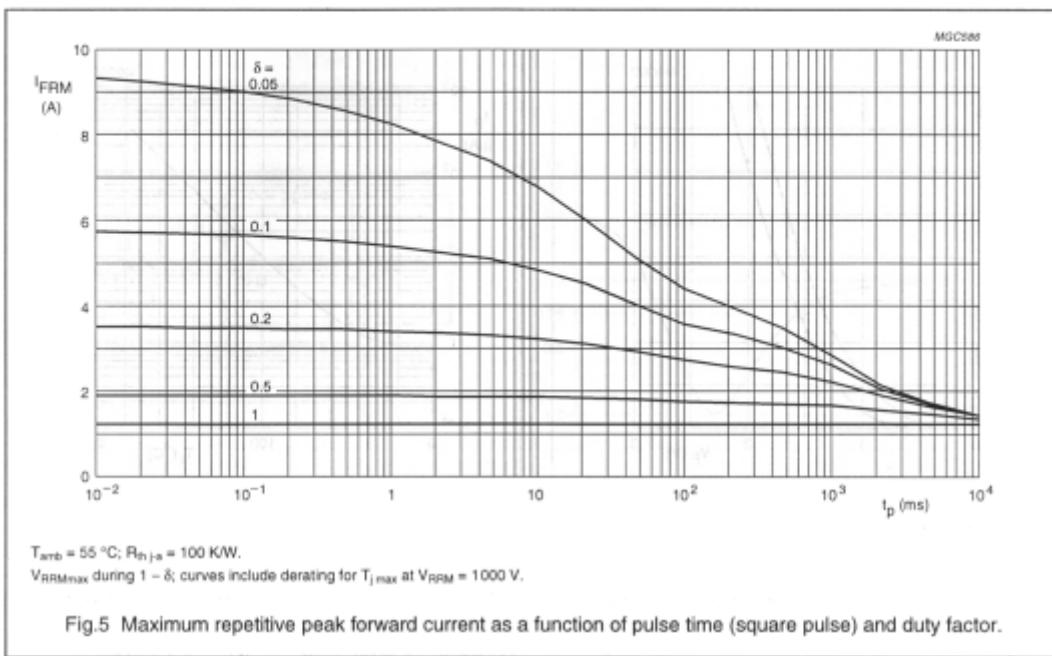


**Fast soft-recovery  
controlled avalanche rectifiers**

**BYV96 series**

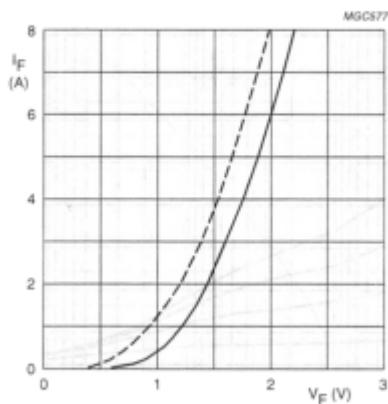


Dotted line:  $T_j = 175^\circ\text{C}$ .  
Solid line:  $T_j = 25^\circ\text{C}$ .

Fig.8 Forward current as a function of forward voltage; maximum values.

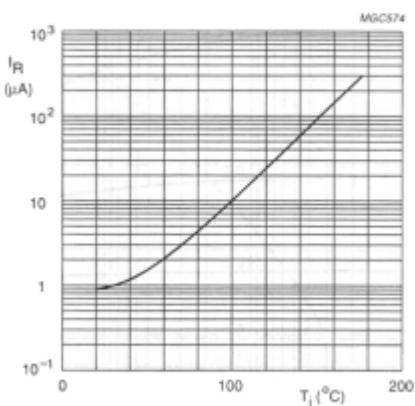


$V_R = V_{RRMmax}$ .

Fig.9 Reverse current as a function of junction temperature; maximum values.

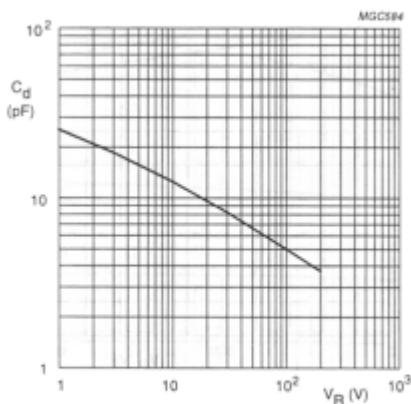

$f = 1\text{ MHz}; T_j = 25^\circ\text{C}$ .

Fig.10 Diode capacitance as a function of reverse voltage; typical values.


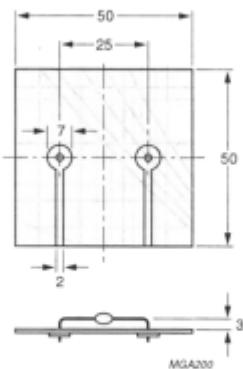


Dimensions in mm.

Fig.11 Device mounted on a printed-circuit board.

Fast soft-recovery  
controlled avalanche rectifiers

BYV96 series

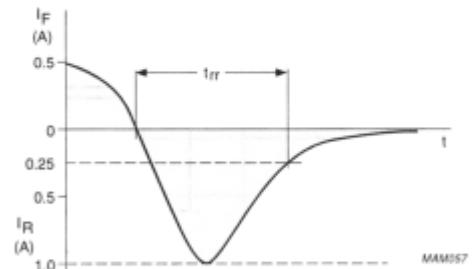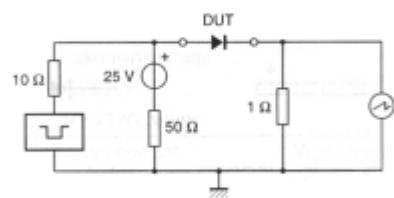

Input impedance oscilloscope:  $1 \text{ M}\Omega$ ,  $22 \text{ pF}$ ;  $t_r \leq 7 \text{ ns}$ .  
Source impedance:  $50 \Omega$ ;  $t_r \leq 15 \text{ ns}$ .

Fig.12 Test circuit and reverse recovery time waveform and definition.

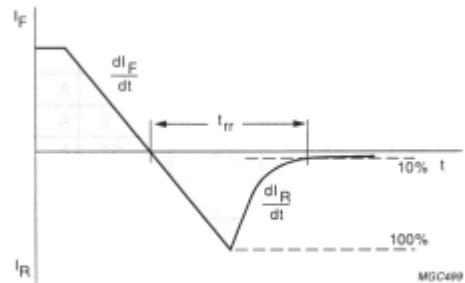


Fig.13 Reverse recovery definitions.