


RFT
SY346/05 ... SY346/10 – SY347/05 ... SY347/10

Schnelle Silizium- Gleichrichterdiode im Kunststoffgehäuse

Typ	U_{RRM} (V)	$U_{RSM}^{1)}$ (V)	$I_{F(AV)}$ (A)	I_{FRM} (A)	I_{FSM} (A)
SY346/05	50	35	0,81	≤ 8	≤ 40
1	100	70	0,81		
2	200	140	0,81		
4	400	280	0,74		
6	600	420	0,68		
8	800	560	0,63		
10	1000	700	0,59		
SY347/05	50	35	0,73		
1	100	70	0,73		
2	200	140	0,73		
4	400	280	0,67		
6	600	420	0,61		
8	800	560	0,57		
10	1000	700	0,53		

¹⁾ empfohlener Wert

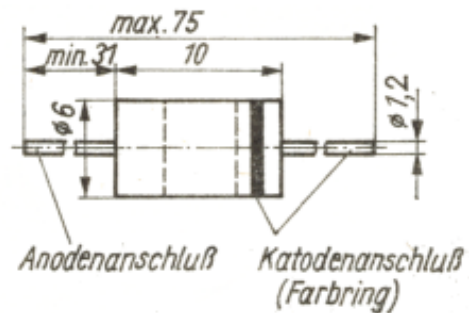

RFT
SY346/05 ... SY346/10 – SY347/05 ... SY347/10

Quelle: Aktive elektronische Bauelemente – 1985